

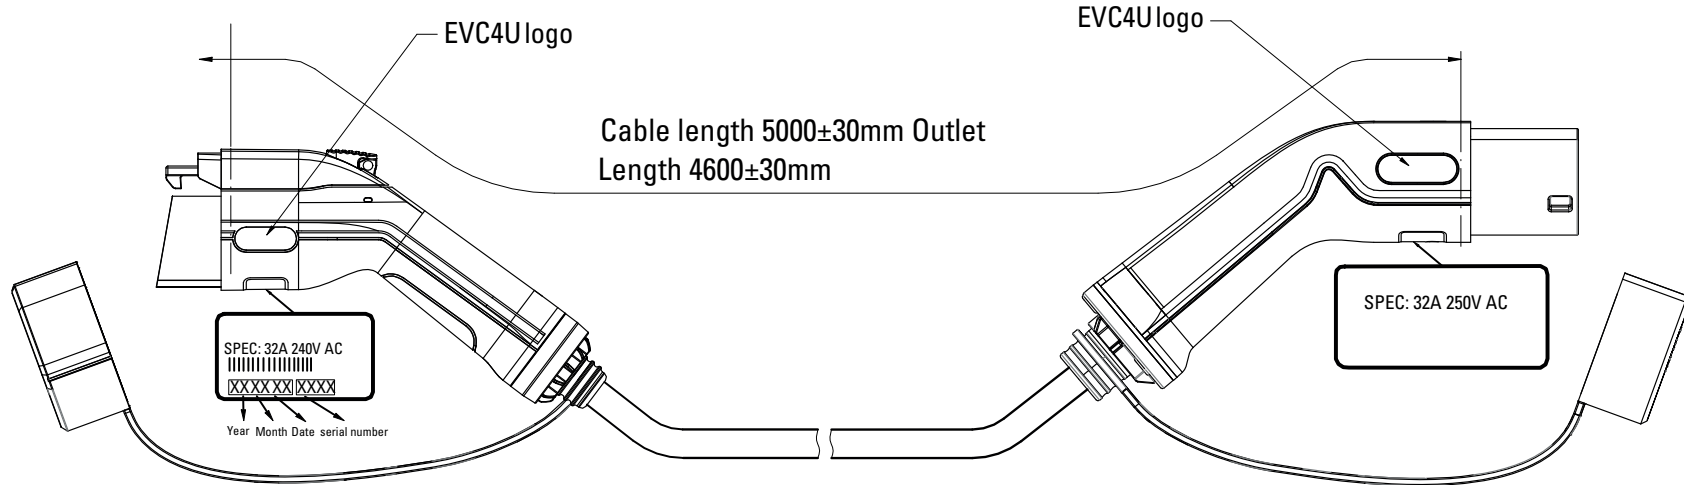
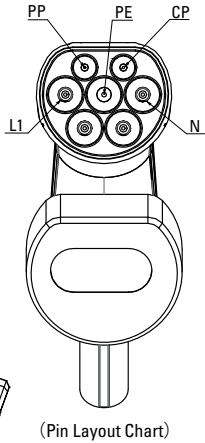



TYPE 1 TO TYPE 2

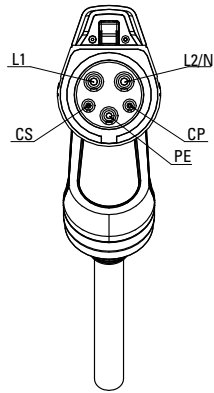

MAIN PARAMETERS

Rated current: 32A
 Rated voltage: 240VAC
 Insulation resistance: >5MΩ, DC500V
 Contact impedance: $c_e: 0.5 \text{ m}\Omega$ Max
 Withstand voltage: $c_e: 2000\text{V}$
 Fireproof grade of rubber shell: UL94V-0
 10000 Mechanical life: unloaded plugged: >10000
 Housing protection class: IP54
 Plastic shell: thermoplastic plastic
 Conductor: copper alloy, silver plated surface
 Working environment temperature: $-30^\circ - +50^\circ$
 Terminal temperature rise: <50K
 Insertion and Extraction Force: <100N
 IEC 62196 Male Plug

A-A

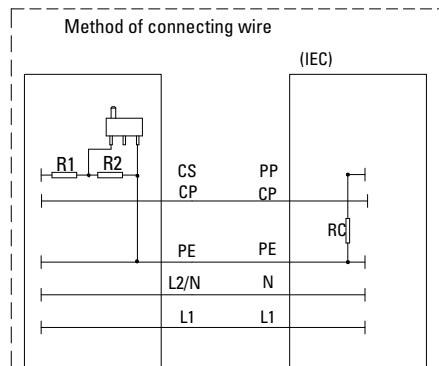

IEC62196-1 2014, IEC62196-2 2017

Charging plug: according to IEC62196-1 2014, IEC6 2196 -2 2017 standard

UKCA

Serial number	Name	Quantity	Material / Specifications
1	(Charging plug)	2	PC/PA66+GF30%
2	(Charging cable)	1	3X6mm ² +1x0.5mm ² TPE)

	(Colour)	
CS	PP	—
CP	CP	(Black) 0.5mm ²
PE	PE	(Yellow-Green) 6mm ²
L2/N	N	(Blue) 6mm ²
L1	L1	(Brown) 6mm ²

R1=150Ω R2=330Ω RC=220Ω



EV Cables4U®

0800 640 6649

info@evcables4u.com

You can find our full range of products at:

www.evcables4u.com